

### Wafer Type Check Valve


**Feature**

End Connection Rating:

JIS 10K, AISI 150#, DIN PN16 PN40

Working Pressure:

10kg/cm<sup>2</sup> , 16kg/cm<sup>2</sup>

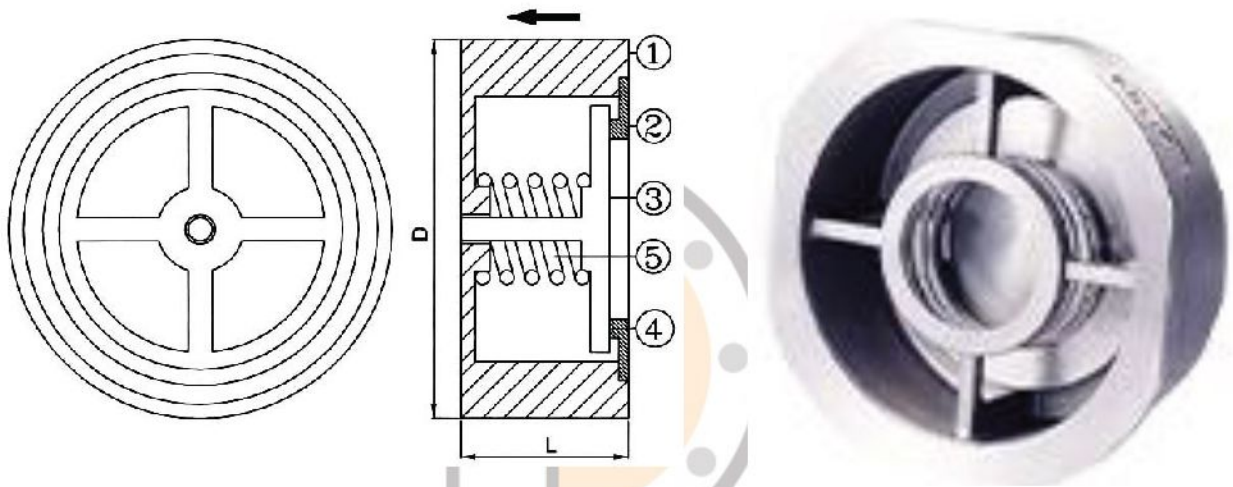

**Material List**

NO.	PART NAME	MATERIAL
1	BODY	CF8, CF8M, CF3M
2	COVER	CF8, CF8M, CF3M
3	DISC	CF8, CF8M, CF3M
4	SEAT	CF8, CF8M, CF3M
5	SPRING	SUS316

**Dimension**

SIZE MARK	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"	
	L	15	19	22	28	33	40	46	50	60	90	106	140	150	160	160	191	203	219	222
D	10K	55	60	70	80	85	104	124	134	159	190	220	270	332	370	415	482	538	594	697
	150LB	47	57	66	76	85	104	124	134	174	190	220	270	332	409	450	512	548	605	697
	PN16	53	63	73	84	94	109	129	144	164	190	220	270	330	386	446	496	557	619	-
	PN40	53	63	73	84	94	109	129	144	170	196	226	293	355	420	477	547	-	-	-