


Equal Tee / Reducing Tee

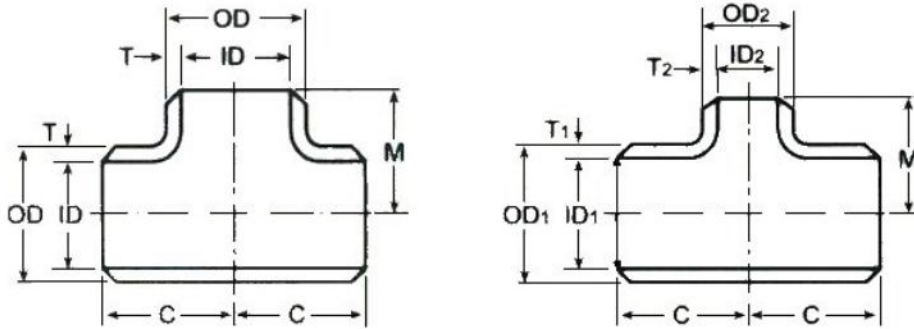

ANSI B16.9 / MSS SP-75 (in mm)

* Wellgrow's standard

Nominal Pipe Size (NPS)	Outside Diameter At Bevel D		Center to End		Nominal Pipe Size (NPS)	Outside Diameter At Bevel D		Center to End	
	Run	Outlet	Run C	Outlet (1) M		Run	Outlet	Run C	Outlet (1) M
1/2 x 1/2	21.3	21.3	25.4	25.4	4 x 4	114.3	114.3	104.6	104.6
1/2 x 3/8		17.1		25.4	4 x 3-1/2		101.6		101.6
1/2 x 1/4		13.7		25.4	4 x 3		88.9		98.6
3/4 x 3/4	26.7	26.7	28.4	28.4	4 x 2-1/2		73.0		95.2
3/4 x 1/2		21.3		28.4	4 x 2		60.3		88.9
3/4 x 3/8		17.1		28.4	4 x 1-1/2		48.3		85.9
1 x 1	33.4	33.4	38.1	38.1	4 x 1-1/4		42.2		
1 x 3/4		26.7		38.1	4 x 1*		33.5		
1 x 1/2		21.3		38.1	5 x 5	141.3	141.3	124.0	124.0
1-1/4 x 1-1/4	42.2	42.2	47.8	47.8	5 x 4		114.3		117.3
1-1/4 x 1		33.4		47.8	5 x 3-1/2		101.6		114.3
1-1/4 x 3/4		26.7		47.8	5 x 3		88.9		111.3
1-1/4 x 1/2		21.3		47.8	5 x 2-1/2		73.0		108.0
1-1/2 x 1-1/2	48.3	48.3	57.2	57.2	5 x 2		60.3		104.6
1-1/2 x 1-1/4		42.2		57.2	5 x 1-1/2*		48.3		
1-1/2 x 1		33.4		57.2	6 x 6	168.3	168.3	142.7	142.7
1-1/2 x 3/4		26.7		57.2	6 x 5		141.3		136.7
1-1/2 x 1/2		21.3		57.2	6 x 4		114.3		130.0
2 x 2	60.3	60.3	63.5	63.5	6 x 3-1/2		101.6		127.0
2 x 1-1/2		48.3		60.5	6 x 3		88.9		124.0
2 x 1-1/4		42.2		57.2	6 x 2-1/2		73.0		120.6
2 x 1		33.4		50.8	6 x 2*		60.3		
2 x 3/4		26.7		44.4	8 x 8	219.1	219.1	177.8	177.8
2 x 1/2*		21.3			8 x 6		168.3		168.1
2-1/2 x 2-1/2	73.0	73.0	76.2	76.2	8 x 5		141.3		162.1
2-1/2 x 2		60.3		69.8	8 x 4		114.3		155.4
2-1/2 x 1-1/2		48.3		66.5	8 x 3-1/2		101.6		152.4
2-1/2 x 1-1/4		42.2		63.5	8 x 3*		88.9		
2-1/2 x 1		33.4		57.2	10 x 10	273.1	273.1	215.9	215.9
3 x 3	88.9	88.9	85.9	85.9	10 x 8		219.1		203.2
3 x 2-1/2		73.0		82.6	10 x 6		168.3		193.5
3 x 2		60.3		76.2	10 x 5		141.3		190.5
3 x 1-1/2		48.3		73.2	10 x 4		114.3		184.2
3 x 1-1/4		42.2		69.8	12 x 12	323.9	323.9	254.0	254.0
3 x 1*		33.4			12 x 10		273.1		241.3
3-1/2 x 3-1/2	101.6	101.6	95.2	95.2	12 x 8		219.1		228.6
3-1/2 x 3		88.9		91.9	12 x 6		168.3		218.9
3-1/2 x 2-1/2		73.0		88.9	12 x 5		141.3		215.9
3-1/2 x 2		60.3		82.6					
3-1/2 x 1-1/2		48.3		79.2					

(1) Outlet dimension "M" for run sizes 14 and larger is recommended but not mandatory.