


### Pipe Nipple Threaded

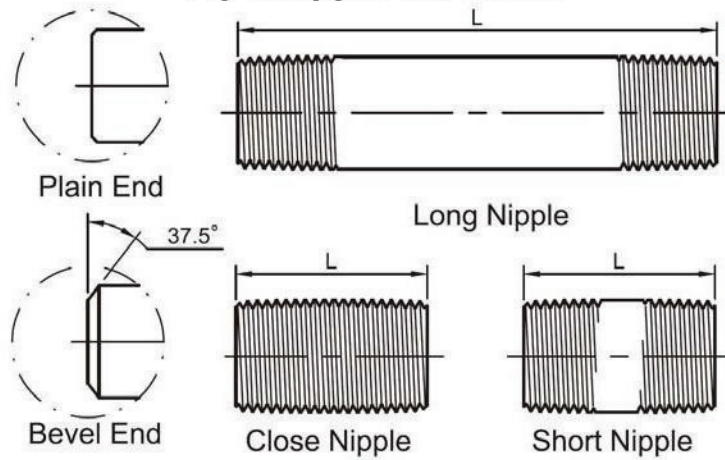

Nom. Pipe Size	L			Plain End Weight (kg/m)			
	Close Nipple	Short Nipple	Long Nipple	Sch40/ST D	Sch80/XS	Sch160	XXS
1/8"	3/4"	1-1/2"	2"~12"	0.37	0.47	-	-
1/4"	7/8"	1-1/2"	2"~12"	0.63	0.8	-	-
3/8"	1"	1-1/2"	2"~12"	0.84	1.1	-	-
1/2"	1-1/8"	1-1/2"	2"~12"	1.27	1.62	1.95	2.55
3/4"	1-3/8"	2"	2-1/2"~12"	1.69	2.2	2.9	3.64
1"	1-1/2"	2"	2-1/2"~12"	2.5	3.24	4.24	5.45
1-1/4"	1-5/8"	2-1/2"	3"~12"	3.39	4.47	5.61	7.77
1-1/2"	1-3/4"	2-1/2"	3"~12"	4.05	5.41	7.25	9.55
2"	2"	2-1/2"	3"~12"	5.44	7.48	11.11	13.44
2-1/2"	2-1/2"	3"	3-1/2"~12"	8.63	11.41	14.92	20.39
3"	2-5/8"	3"	3-1/2"~12"	11.29	15.27	21.35	27.68
3-1/2"	2-3/4"	4"	4-1/2"~12"	13.57	18.64	-	-
4"	2-7/8"	4"	4-1/2"~12"	16.08	22.32	33.54	41.03
5"	3"	4-1/2"	5"~12"	21.77	30.97	49.12	57.43
6"	3-1/8"	4-1/2"	5"~12"	28.26	42.56	67.57	79.22

- (1) Specifications in accordance with ASTM A733-2016.
- (2) Weld bevel in accordance with ASME B16.25.

### Shape of Thread

